

# handa 2023.12 48F



**Oil Pattern Distance:** 48 Feet      **Reverse Brush Drop:** 40 Feet      **Oil Per Board:** 50 uL  
**Forward Oil Total:** 15.25 mL      **Reverse Oil Total:** 6.45 mL      **Volume Oil Total:** 21.7 mL  
**Forward Boards Crossed:** 305 Boards      **Reverse Boards Crossed:** 129 Boards      **Total Boards Crossed:** 434 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	4L	4R	1	10	33	0.0	0.0	0.0	1650
2	6L	6R	1	10	29	0.0	1.4	1.4	1450
3	6L	6R	2	14	58	1.4	5.3	3.9	2900
4	8L	8R	3	18	75	5.3	12.9	7.6	3750
5	10L	10R	3	18	63	12.9	20.5	7.6	3150
6	12L	12R	2	22	34	20.5	26.7	6.2	1700
7	14L	14R	1	22	13	26.7	29.8	3.1	650
8	2L	2R	0	30	0	29.8	48.0	18.2	0

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	48.0	30.0	-18.0	0
2	13L	13R	1	30	15	30.0	25.8	-4.2	750
3	11L	11R	1	30	19	25.8	21.6	-4.2	950
4	7L	7R	1	26	27	21.6	18.0	-3.6	1350
5	5L	5R	1	22	31	18.0	14.9	-3.1	1550
6	2L	2R	1	18	37	14.9	12.4	-2.5	1850
7	2L	2R	0	14	0	12.4	3.0	-9.4	0
8	2L	2R	0	10	0	3.0	0.0	-3.0	0

Conditioner:  
Type In or Select  
One

TransferType:  
Type In or Select  
One

Forward




Reverse



Combined



Buff

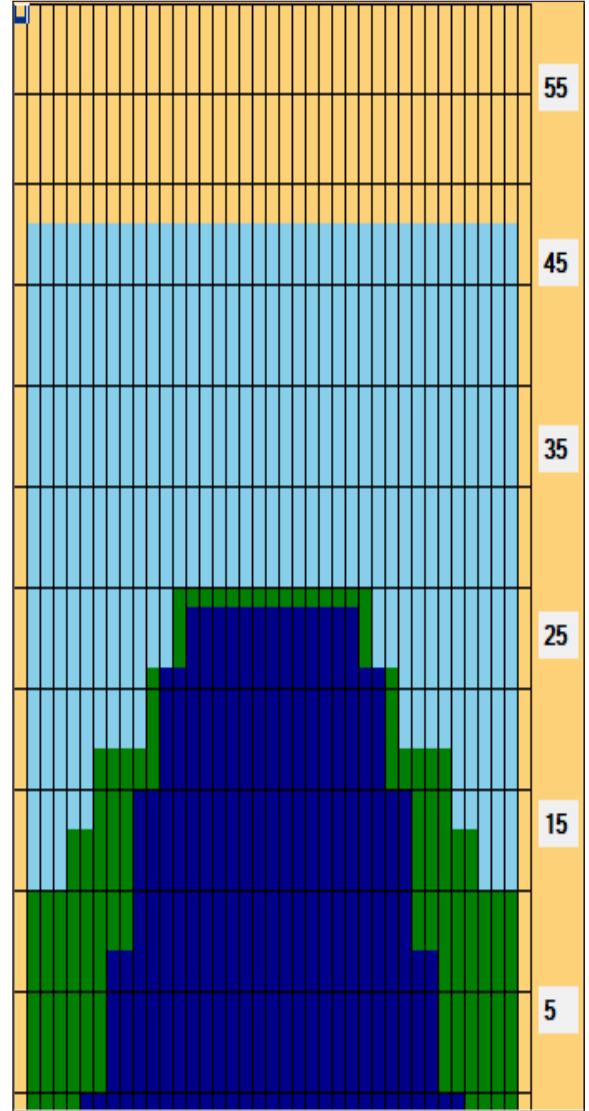

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	4.74	1.43	1.01	1.01	1.43	4.74

