
## 2025JPBA全日本42F



Oil Pattern Distance: 42 Feet **Reverse Brush Drop:** 33 Feet Oil Per Board: 50 uL **Forward Oil Total:** 19.6 mL **Reverse Oil Total:** 12.1 mL **Volume Oil Total:** 31.7 mL Forward Boards Crossed: 392 Boards Reverse Boards Crossed: 242 Boards **Total Boards Crossed:** 634 Boards

2 3L 3R 1 14 35 1.4 3.3 1.9 175( 3 6L 4R 1 14 31 3.3 5.2 1.9 155( 4 8L 6R 3 14 81 5.2 11.1 5.9 405( 5 10L 7R 1 14 24 11.1 13.0 1.9 120( 6 13L 8R 3 18 60 13.0 20.6 7.6 300( 7 15L 10R 3 18 48 20.6 28.2 7.6 240( 8 16L 12R 3 18 39 28.2 35.8 7.6 195( 9 2L 2R 0 22 0 35.8 38.0 2.2		Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
3 6L 4R 1 14 31 3.3 5.2 1.9 155( 4 8L 6R 3 14 81 5.2 11.1 5.9 405( 5 10L 7R 1 14 24 11.1 13.0 1.9 120( 6 13L 8R 3 18 60 13.0 20.6 7.6 300( 7 15L 10R 3 18 48 20.6 28.2 7.6 240( 8 16L 12R 3 18 39 28.2 35.8 7.6 195( 9 2L 2R 0 22 0 35.8 38.0 2.2	1	2L.	2R	2	10	74	0.0	1.4	1.4	3700
4 8L 6R 3 14 81 5.2 11.1 5.9 4050   5 10L 7R 1 14 24 11.1 13.0 1.9 1200   6 13L 8R 3 18 60 13.0 20.6 7.6 3000   7 15L 10R 3 18 48 20.6 28.2 7.6 2400   8 16L 12R 3 18 39 28.2 35.8 7.6 1950   9 2L 2R 0 22 0 35.8 38.0 2.2	2	3L	3R	1	14	35	1.4	3.3	1.9	1750
5     10L     7R     1     14     24     11.1     13.0     1.9     1200       6     13L     8R     3     18     60     13.0     20.6     7.6     3000       7     15L     10R     3     18     48     20.6     28.2     7.6     2400       8     16L     12R     3     18     39     28.2     35.8     7.6     1950       9     2L     2R     0     22     0     35.8     38.0     2.2     0	3	6L	4R	1	14	31	3.3	5.2	1,9	1550
8 13L 8R 3 18 60 13.0 20.6 7.6 3000 7 15L 10R 3 18 48 20.6 28.2 7.6 2400 8 16L 12R 3 18 39 28.2 35.8 7.6 1950 9 2L 2R 0 22 0 35.8 38.0 2.2	4	8L	6R	3	14	81	5.2	11.1	5.9	4050
7 15L 10R 3 18 48 20.6 28.2 7.6 2400 8 16L 12R 3 18 39 28.2 35.8 7.6 1950 9 2L 2R 0 22 0 35.8 38.0 2.2 0	5	10L	7R	1	14	24	11.1	13.0	1.9	1200
8 16L 12R 3 18 39 28.2 35.8 7.6 1950 9 2L 2R 0 22 0 35.8 38.0 2.2 0	6	13L	8R.	3	18	60	13.0	20.6	7.6	3000
9 2L 2R 0 22 0 35.8 38.0 2.2 (	7	15L	10R	3	18	48	20.6	28.2	7.6	2400
	8	16L	12R	3	18	39	28.2	35.8	7.6	1950
0 2L 2R 0 26 0 38.0 42.0 4.0 (	9	2L	2R	0	22	0	35.8	38.0	2.2	0
	0	2L	2R	0	26	0	38.0	42.0	4.0	0
◆ ▶ Forward Reverse More										
		Start	Forwa			More Crossed	Start	End	Feet	T.Oil

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	42.0	27.0	-15.0	0
2	17L	13R	2	22	22	27.0	20.8	-6.2	1100
3	14L	9R	1	18	18	20.8	18.3	-2.5	900
4	13L	8R	1	18	20	18.3	15.8	-2.5	1000
5	10L	7R	2	18	48	15.8	10.7	-5.1	2400
6	5L	5R	2	14	62	10.7	6.8	-3.9	3100
7	3L	3R	1	10	35	6.8	5,4	-1.4	1750
8	2L	2R	1	10	37	5.4	4.0	-1.4	1850
9	2L	2R	0	10	0	4.0	0.0	-4.0	0

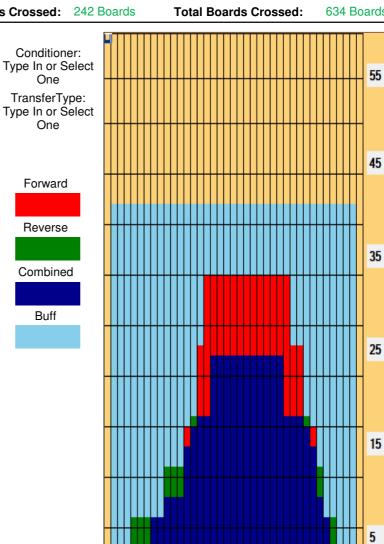

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Mlddle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	4.09	2.11	1.22	1	1.27	3.07
Forward O	Reverse Oil					
1350						<del> </del>

